

Clapets de non-retour Typ 190D / 190P

3/8"- 2"


Données techniques

Système de fermet.:	TJO
Pression de service.:	Max.10 bar
Raccordement:	Taraudé femelle, femelle G
Corps:	PVC
Fluide:	Liquides, neutres, propres et l'air
Temp. de fluide.:	-10°C / +60°C
Position de mont.:	Toutes directions



Encombrement [mm]

Art.-No.	Type	G	L	SW	Kv[m³/h]
3719 / 2017	190D/190P 03	3/8"	56	23	2.9
3720 / 14065	190D/190P 05	1/2"	56	27	2.9
3721 / 1128	190D/190P 07	3/4"	75	31	7.6
3722	190D 10	1"	95	40	11.2
3723	190D 12	1 1/4"	119	49	21.4
3724	190D 15	1/2"	148	56	27.8
3725	190D 20	2"	180	66	41.1

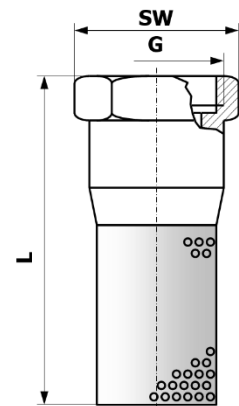

Matériaux	190D	190P
Corps:	POM	PP
Joint:	EPDM	FKM
Oopturateur:	3/8" - 1/2" : PA12 3/4" - 2" : POM	PP PP
Crepine:	POM/PE	PP
Resort:	Inox	Inox
Bague:	POM	POM